


**MONOBLOCK TYPE EM235I...**

**MONOBLOCK TYP EM235I...**




Monoblock with side ports A-B-P = 3/4" G, T = 1" G.  
Version with double discharge, with/without pressure relief valve.(RV)

Monoblock, seidl. Anschl. A-B = 3/4" G, P = 3/4" G, T = 1" G.  
Version mit doppeltem Ablauf, mit/ohne Druckbegrenzungsventil (DBV)

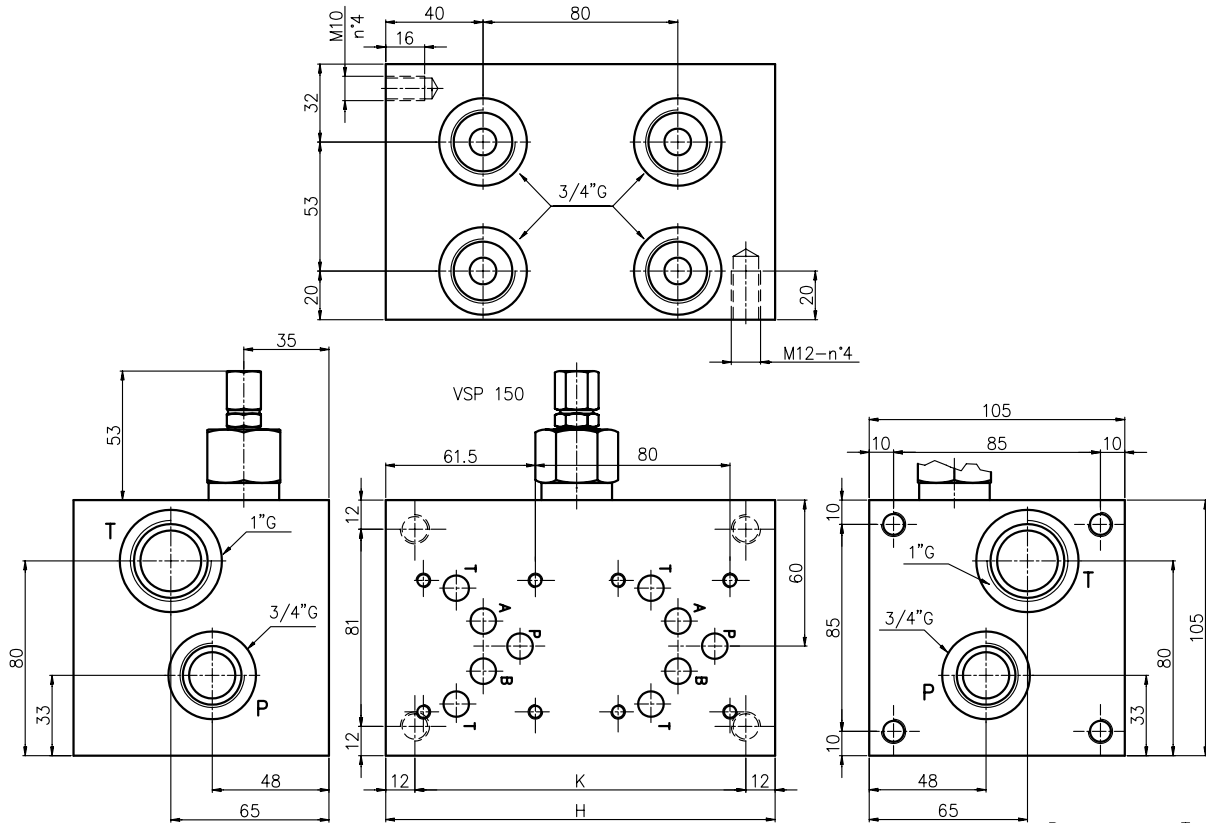

N° Elem.	H	K	(Kg)
1Y	80	56	5
1Z	110	86	8
2	160	136	12
3	240	216	18.5
4	320	296	25
5	400	376	31.5
6	480	456	38

Symbol  
parallel conn.  
parallel schalt.

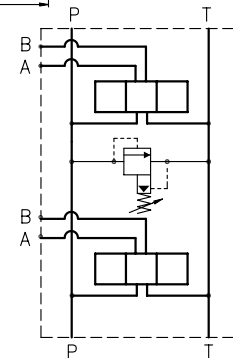

Ordering code  
Bestell-Code

EM 23 5 / \* \* \* F — Setting / Einstellung  
 F = by key / Schlussverstellung

EUROFLUID  
 Monoblock = M

double discharged  
 mit doppeltem Ablauf = 23

CETOP 5

N° of elem. / Anzahl Elem. = 2-3-4-5-6

Spring type / Feder Type  
 0 = 1.7-70 bar  
 2 = 10-210 bar  
 3 = 35-350 bar

X = with RV / mit DBV  
 Z = prearranged for RV fuer DBV vorgebohrt  
 Y = without RV / ohne DBV

NOTES : See page 52 for technical characteristics of RV  
BEMERKUNG : Siehe techn. Daten des DBV auf Seite 52

**CETOP 5  
NG 10**